
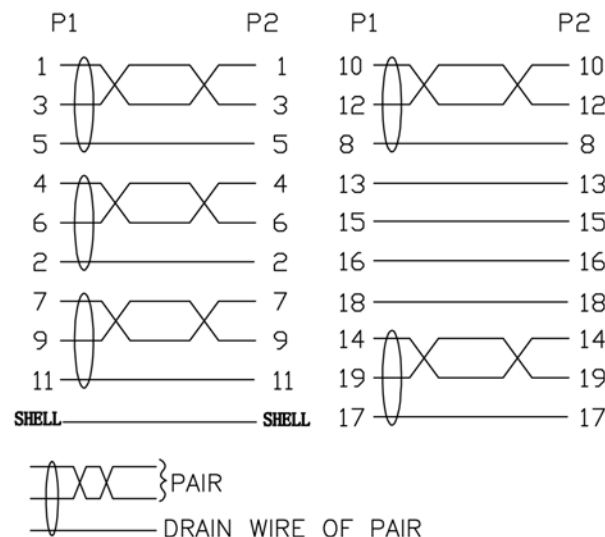


PIN OUT

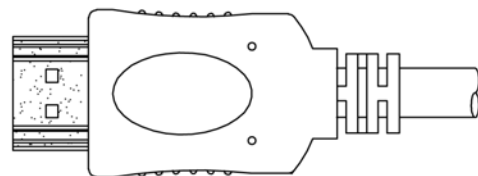

REQUIREMENTS:

1:100% short and open testing.

2:Test conditions
 DC300V /10MS
 Insulation resistance 10MΩ(Min)
 Conduction resistance 5Ω(Max)
 3:1080P testing.

④	OUTER MOLDED	BLACK 45P PVC	0.028	KG
③	INTER MOLDED	LDPE	0.028	KG
②	CONNECTOR	HDMI A TYPE MALE BLACK INSULATOR,GOLD PLATED SHELL,GOLD PLATED PIN	2	PCS
①	CABLE	(1P*30#+D+AL+MYLAR)*5C+4C*30#+ADB OD:6.0±0.15 JACKET:BLACK PVC	0.5	M
NO.	MATERIAL	DESCRIPTIONG	QTY.	UNIT

Ltemref	Quantity	Title/Name,designation,material,dimension etc			Article No./Reference	
Designed by	Checked by	Approved by - date	File name	Date	Scale	
		MARCH 4.2012	14 HDMI M/M TO L=0.5M	MARCH 4.2012	FREE	
			26-7005LS			
			26-7005LS	Edition 1	Sheet 1/2	